



**HAL**  
open science

## Bioconversion of the Brown Tunisian Seaweed *Halopteris scoparia*: Application to Energy

Farah Hadjkacem, Guillaume Pierre, Gwendoline Christophe, Jihen Elleuch,  
Imen Fendri, Zakaria Boual, Mohamed Didi Ould El Hadj, Zainab El  
Alaoui-Talibi, Cherkaoui El Modafar, Pascal Dubessay, et al.

### ► To cite this version:

Farah Hadjkacem, Guillaume Pierre, Gwendoline Christophe, Jihen Elleuch, Imen Fendri, et al..  
Bioconversion of the Brown Tunisian Seaweed *Halopteris scoparia*: Application to Energy. *Energies*,  
2022, 15, pp.4342. 10.3390/en15124342 . hal-03703717

**HAL Id: hal-03703717**

**<https://uca.hal.science/hal-03703717>**

Submitted on 24 Jun 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

## Article

# Bioconversion of the Brown Tunisian Seaweed *Halopteris scoparia*: Application to Energy

Farah Hadjkacem <sup>1,2</sup>, Guillaume Pierre <sup>2,\*</sup>, Gwendoline Christophe <sup>2</sup>, Jihen Elleuch <sup>1</sup>, Imen Fendri <sup>3</sup>, Zakaria Boual <sup>4</sup>, Mohamed Didi Ould El Hadj <sup>4</sup>, Zainab El Alaoui-Talibi <sup>5</sup>, Cherkaoui El Modafar <sup>5</sup>, Pascal Dubessay <sup>2</sup>, Cédric Delattre <sup>2,6</sup>, Philippe Michaud <sup>2</sup> and Slim Abdelkafi <sup>1,\*</sup>

- <sup>1</sup> Laboratoire de Génie Enzymatique et Microbiologique, Equipe de Biotechnologie des Algues, Ecole Nationale d'Ingénieur de Sfax, Sfax 3038, Tunisia; hadjkacemfarah@gmail.com (F.H.); jihen.elleuch@enis.tn (J.E.)
  - <sup>2</sup> Institut Pascal, Université Clermont Auvergne, CNRS, Clermont Auvergne INP, F-63000 Clermont-Ferrand, France; gwendoline.christophe@uca.fr (G.C.); pascal.dubessay@uca.fr (P.D.); cedric.delattre@uca.fr (C.D.); philippe.michaud@uca.fr (P.M.)
  - <sup>3</sup> Laboratory of Plant Biotechnologies Applied to the Improvement of Plants, Faculty of Sciences, University of Sfax, Sfax 3038, Tunisia; imen.fendri@fss.usf.tn
  - <sup>4</sup> Laboratory for the Protection of Ecosystems in Arid and Semi-Arid Zones, Kasdi Merbah-University, Ouargla 30000, Algeria; biozakaria1983@gmail.com (Z.B.); mohameddidi@yahoo.fr (M.D.O.E.H.)
  - <sup>5</sup> Centre d'Agrobiotechnologie et Bioingénierie, Unité de Recherche Labellisée CNRST (Centre AgroBiotech-URL-CNRST-05), Faculté des Sciences et Techniques Marrakech, Université Cadi Ayyad, Marrakech 40000, Morocco; zainab.elalaouitalibi@gmail.com (Z.E.A.-T.); elmodafar@uca.ac.ma (C.E.M.)
  - <sup>6</sup> Institut Universitaire de France (IUF), 1 Rue Descartes, F-75005 Paris, France
- \* Correspondence: guillaume.pierre@uca.fr (G.P.); slim.abdelkafi@enis.tn (S.A.); Tel.: +33-473-407-422 (G.P.); +216-97-458-923 (S.A.)



**Citation:** Hadjkacem, F.; Pierre, G.; Christophe, G.; Elleuch, J.; Fendri, I.; Boual, Z.; Ould El Hadj, M.D.; El Alaoui-Talibi, Z.; El Modafar, C.; Dubessay, P.; et al. Bioconversion of the Brown Tunisian Seaweed *Halopteris scoparia*: Application to Energy. *Energies* **2022**, *15*, 4342. <https://doi.org/10.3390/en15124342>

Academic Editors: Shivom Sharma and Gade Pandu Rangaiah

Received: 30 March 2022

Accepted: 11 June 2022

Published: 14 June 2022

**Publisher's Note:** MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



**Copyright:** © 2022 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

**Abstract:** The brown Tunisian seaweed *Halopteris scoparia* was used as a feedstock for producing renewable bioethanol, biogas, and biodiesel to demonstrate the proof of concept for the North African energy sector. A quantitative and qualitative quantification of *H. scoparia* composition using different colorimetric methods was completed to highlight its bioconversion potential. These substrate inputs were subjected to anaerobic fermentation by *Saccharomyces cerevisiae* to produce bioethanol. The materials were also used to generate bio-hydrogen and volatile fatty acids during dark fermentation by a bacterial consortium and using the oleaginous yeast *Yarrowia lipolytica*. The lipids were extracted and trans-esterified to Fatty Acid Methyl Esters (FAMES), and their profiles were then analyzed with gas chromatography (GC). A significant ratio of the bioethanol, e.g., 0.35 g ethanol/g DW substrate, was produced without pretreatment, consistent with the theoretical Gay-Lussac yield. The production of the biohydrogen and lipids were up to 1.3 mL H<sub>2</sub>/g DW substrate and 0.04 g/g DW substrate, respectively, from the raw biomass. These results were higher than those reported for other well-studied seaweeds such as *L. japonica*. Overall, this work contributes to the current investigations in Tunisia for producing alternative energies from algae and finding new solutions to the current energy situation and environmental challenges in Maghreb.

**Keywords:** *Halopteris scoparia*; by-product; ethanol; bio-hydrogen; lipid; fermentation

## 1. Introduction

Macroalgae, commonly referred to as seaweed, are multicellular, macroscopic, eukaryotic, and autotrophic organisms divided into three categories depending on their thallus pigmentations (green, red, and brown), which can be harvested from natural resources but also cultivated [1,2]. Owing to their richness in organic compounds and their ability to generate bioactive primary and secondary metabolites (e.g., pigments, fatty acids, proteins, polyphenols, enzymes, and carbohydrates), seaweeds are beneficial resources widely studied over the past decade [3].

Until recently, several nations have shown a significant interest in the usage and the exploitation of macroalgae for a variety of reasons, such as the production of polysaccharides, which can possess interesting properties for polymers (biocompatibility, non-toxicity, and biodegradability), de facto contributing to their high economic worth, especially in a strong sustainable development context [4]. This is the case for the sulfated polysaccharides, alginate, and laminarin extracted from brown macroalgae, despite their low mass content (up to 5% *w/w*) [5–7]. Other active molecules can be extracted from seaweeds, for instance phenolic compounds, which can show significant anti-inflammatory or anti-proliferative characteristics [8]. The macroalgae extracts have many other reported benefits, such as antitumor, antioxidant and antiviral properties [9,10], causing a rise in seaweed derivatives on the markets, owing to these numerous health-promoting characteristics [11,12]. Besides, these products can not only be used in the fields of feed/food, nutraceuticals, and/or cosmetics, but also as fodder fertilizer and for biofuels' production, which thus enhance the blue biotechnologies' economy [13]. Some of the seaweeds contain essential fatty acids, such as linolenic (C18:3) and linoleic acids (C18:2) [14]. Lipids and fatty acids produced by marine macroalgae could be transformed into biodiesel, which has similar qualities to the conventional diesel fuel and may be used either straight in current diesel engines or mixed with diesel from petrochemistry. The production of biofuels from seaweed is a green technology that could minimize environmental damages by limiting the over-exploitation of fossil fuels, expected to rise by 40% between 2010 and 2040 [15]. This is particularly true regarding the political stability in Europe and the strong dependence on fossil fuels and gas in 2022. Many of the studies have reported the contribution of macroalgae as renewable and economical sources to address climate change issues [16]. Shifting to renewable energies and/or new ways for making clean energies is, thus, of utmost interest.

Macroalgae have a higher photosynthetic capability than terrestrial plants, as well as high water and carbohydrate contents [17–20]. Factors such as the productivity, relative ease of growing, harvesting, and scalability are also major considerations for choosing a specific seaweed (raw and/or by-products from seaweed processing) as biofuel feedstock [17–20]. According to Chen et al. [20], macroalgae may produce a net energy of 11,000 MJ/t dry algae [21], in comparison to 9500 MJ/t from microalgae gasification. Brown seaweed contains quantities of fermentable sugars (laminarin, fucoidan, alginate, glucan-like, etc.) without the presence of lignin (as for terrestrial plants). It can thus be used in the macroalgae-based biorefinery technologies for producing biomethane, bioethanol, biodiesel, and bio-oils [20,21]. The red, green, and especially brown macroalgae were subjected to fermentation under anaerobic digestion, using different strains such as *S. cerevisiae* or *P. angophorae* to produce ethanol [22]. For instance, *L. hyperborean*, *J. rubens*, *U. lactuca* or *S. latifolium* from the Egyptian Mediterranean were characterized as bioethanol feedstock after fermentation [22]. Note that the various conversion methods are detailed in recent reviews, such as fermentation, anaerobic digestion, liquefaction, transesterification, or pyrolysis [20,21]. Aboulkas et al. showed that 24.1% and 44% of bio-oil and biochar can be obtained prior to a pyrolysis conversion from the Moroccan *G. sesquipedale* [23]. High quality biodiesel production was reported after some transesterification steps by using *P. padina* from the Abu Qir Bay in North Africa [24].

Tunisia, with 1300 km of Mediterranean Sea coastlines, aims to develop the exploitation of macroalgae for creating new operational sectors in energy. *Halopteris scoparia*, belonging to the phaeophyceae species, is an abundant brown seaweed on the Tunisian north coast, which is still in the process of having its worth evaluation. To our knowledge, no other works to date have covered the bioconversion potential of *H. scoparia*. Thus, this work aims to provide a proof of concept for using *H. scoparia* biomass (as well as some of the by-products generated after the extraction of its high-value biomolecules) as a material to produce various types of energy vectors [25,26]. Thus, Bioethanol, H<sub>2</sub>, and lipids were, respectively, produced by fermentation (*Saccharomyces cerevisiae*) and dark fermentation (microbial consortium and *Yarrowia lipolytica*). The results could contribute to the integration

of *H. scoparia* into a global biorefinery conversion process in Tunisia, and more generally in Maghreb.

## 2. Materials and Methods

### 2.1. Algal Biomass

The *H. scoparia* biomass was gathered in February 2020 from Tabarka city, which is in the north-west of Tunisia (36°57'36.223" N and 8°45'12.018" E). After harvesting, the thalli were rinsed with distilled water to remove the salts and dried for 20 days at 50 °C [27]. The dried samples were then pulverized into a powder size of 16–40 µm using a blender (Moulinex, France). This item was labeled as the raw seaweed and given the abbreviation "RSF" (Raw Seaweed Fraction). Two further fractions were employed in this study. They were generated after the extraction and purification of the polysaccharides and pigments from the *H. scoparia* dry biomass [27] and were, respectively, termed "BP1-PS" and "BP2-F". The BP1-PS is a by-product obtained from the carbohydrates' (fucoidan/alginate) extraction. Briefly, after depigmenting and delipidating the dry biomass (100 g) using acetone (1.4 L) and methanol (0.6 L) treatment (twice) for 24 h at 25 °C, the obtained biomass (75 g) was treated for 2 h at 60 °C with chlorohydric acid (0.1M, pH = 2) to extract the fucoidans, then filtered and treated with Na<sub>2</sub>CO<sub>3</sub> (3%, pH = 11) at 60 °C to extract the alginates, then dried for 24 h at 50 °C [23,24]. The BP2-F is a by-product obtained from the depigmented biomass with successive treatments, using methanol to remove all of the pigments for a 72 h period at 25 °C under stirring (250 rpm). After filtering, the biomass was collected and dried for 24 h at 50 °C [28,29].

### 2.2. Algal Biomass Characterization and Chemicals Constituents

#### 2.2.1. Carbohydrate Content of the Three Fractions

The nonenzymatic gravimetric technique was used to determine the total polysaccharides of RPS, BP1-PS, and BP2-F (AOAC Official Method 993.21) [30,31]. One hundred mg of RPS and BP1-PS were depigmented with acetone (1400 mL) then delipidated with methanol (600 mL) for 14 h at room temperature with moderate stirring. The obtained suspensions were filtered using a fine mesh strainer with a porosity of 16–40 µm. RPS, BP1-PS and BP2-F previously depigmented and delipidated were macerated in ultra-pure water (100 mL) for 4 h at 80 °C under gentle stirring (400 rpm). Cold ethanol 96% (300 mL, −20 °C) was used to precipitate the polysaccharides fractions. The suspensions were centrifuged at a rate of 20,000 × *g* for 20 min at 4 °C, and the pellets were recovered. The following ethanolic precipitation cycle was completed three times. After that, the pellets were suspended in ultra-pure water (50 g/L) and freeze dried. From these fractions, the total carbohydrate contents were determined using the Dubois colorimetric technique, and the reducing sugars using the bicinchoninic acid method, both using glucose as standard [32,33].

#### 2.2.2. Phenolic Content

Ultrasound was used to quantify the phenolic chemicals RPS, BP1-PS, and BP2-F (main fractions from Section 2.1). Ten g of the dried macroalgae were mixed with 200 mL of acetone (80%) and incubated for 45 min at 4 °C, 120 W, and 40 KHz. The suspension was then centrifuged (5000 × *g* for 10 min at 4 °C), and the supernatant was collected and dried, using a rotary evaporator (Stuart RE300B, Stone, UK) at room temperature [34]. The total phenolic content was determined using the Folin–Ciocalteu technique, established by Singleton (1965) and using Gallic acid as the standard [35].

#### 2.2.3. Composition in Chemical Elements

This composition was determined after heating the RPS, BP1-PS, and BP2-F at 550 °C for 6 h. Prior to an acidic treatment with 5 mL chlorohydric acid (37%) and 5 mL nitric acid (2M), the ions concentrations for the fractions were assessed, using an Atomic Absorption Spectroscopy (iCETM3300, Thermo Scientific, Waltham, MA, USA) [36].

#### 2.2.4. Lipid Extraction

The Soxhlet technique was used to determine the total lipids of the RPS, BP1-PS, and BP2-F. In a nutshell, 500 mg of each of the fractions were inserted in a thimble in a Soxhlet extractor, along with 170 mL of the hexane in a round-bottomed flask for 4 h at 60 °C, followed by 40 min of solvent distillation. After 30 min of hexane evaporation using a rotary evaporator at 55 °C (Stuart RE300B, Bibby Scientifics, Stone, UK), the round-bottom flask was placed in an oven to be weighted, and the percentage of lipids that it contained was determined [37].

#### 2.2.5. Ash, Moisture, and Protein Contents

The dry weight (DW) of the RPS, BP1-PS, and BP2-F was measured, using the AOAC technique, by drying 0.5 g of each sample in an air oven at 105 °C for 24 h. The ash content was calculated after drying 50 mg of RPS, BP1-PS, and BP2-F in a furnace at 550 °C for 4 h. The protein content in the RPS, BP1-PS, and BP2-F was quantified, using the Kjeldahl test and an AOAC International nitrogen conversion factor of 6.25 (method 981.10) [38].

### 2.3. Fermenting Microorganism, Medium Culture, and Production Process

#### 2.3.1. Ethanol Production

*Saccharomyces cerevisiae* ATCC 7754 was used to produce bioethanol [39]. The experiment was conducted in 500 mL Erlenmeyer flasks containing 200 mL of culture medium, described by Kristiansen (1994), and consisting of glucose (50 g/L); yeast extract (3 g/L); monobasic potassium phosphate ( $\text{KH}_2\text{PO}_4$ ) (5 g/L); ammonium sulfate ( $\text{NH}_4$ )<sub>2</sub>SO<sub>4</sub> (2 g/L); KCl (120 mg/L); CaCl<sub>2</sub>, 2H<sub>2</sub>O (60 mg/L); MgCl<sub>2</sub>, 2H<sub>2</sub>O (520 mg/L); FeSO<sub>4</sub>, 6 H<sub>2</sub>O (35 mg/L); MnSO<sub>4</sub>, H<sub>2</sub>O (3.8 mg/L); CuSO<sub>4</sub>, 5 H<sub>2</sub>O (0.5 mg/L); thiamine-chlorohydric acid (5 mg/L); pyridoxine-chlorohydric acid (6.25 mg/L); nicotinic acid (5 mg/L); D-biotin (0.125 mg/L); pantothenic acid (6.25 mg/L); myo-inositol (125 mg/L) and traces of ZnSO<sub>4</sub>, 7 H<sub>2</sub>O (2.3 µg/L); CoSO<sub>4</sub>, 4 H<sub>2</sub>O (2.3 µg/L); NaMoO<sub>4</sub>, 2 H<sub>2</sub>O (3.3 µg/L); H<sub>3</sub>BO<sub>3</sub> (7.3 µg/L); KI (1.7 µg/L); NiSO<sub>4</sub>, 6 H<sub>2</sub>O (2.5 µg/L) [40].

The *S. cerevisiae* was inoculated in snugly closed flasks and fermentation was carried out for 48 h at 30 °C under gentle stirring of 200 rpm (INFORS HT, Bottmingen, Switzerland). The biomass growth was measured at 550 nm. To estimate the ethanol production, 5 mL were taken and centrifuged at 10,000 × g for 5 min at 25 °C every 6 h. Before further investigation, 1 mL of each supernatant was deproteinized with 125 mL of barium hydroxide solution (0.3 M) combined with 125 mL of zinc sulfate solution (5% w/v) and centrifuged at 10,000 × g for 5 min at 25 °C. The ethanol was quantified using a high-performance liquid chromatography (HPLC) apparatus (1260 Infinity Quaternary LC system, Agilent Technology, Palo Alto, CA, USA) outfitted with two ionic exclusion columns in series (Rezex ROA 300 7.8 mm, Phenomenex, Torrance, CA, USA). The samples were filtered using a cellulose acetate filter (0.2 µm), injected (10 µL), and eluted in an aqueous sulfuric acid solution (5 mM) mobile phase at a flow rate of 0.7 mL/min and 50 °C. The ethanol concentrations were measured using a refractometer (HP 1100 series, Agilent Technologies, Palo Alto, CA, USA) and an ethanol standard curve (0 to 100 g/L). The M8620AA OpenLAB Data Store Software A.02.01 was used to analyze the results.

#### 2.3.2. Hydrogen and Volatile Fatty Acid Productions

For biohydrogen generation via anaerobic fermentation, the microbial consortium was chosen from a sewage treatment facility and treated with 2-bromoethanesulfonate in a complete medium to minimize the methane production from the archaea and to stabilize the community [26]. The composition of this culture medium was: K<sub>2</sub>HPO<sub>4</sub> (18 g/L); KH<sub>2</sub>PO<sub>4</sub> (18 g/L); (NH<sub>4</sub>)<sub>2</sub>SO<sub>4</sub> (72 g/L); NaCl (12 g/L); MgSO<sub>4</sub>, 7H<sub>2</sub>O (1.2 g/L); CaCl<sub>2</sub>, 2H<sub>2</sub>O (1.2 g/L); MnSO<sub>4</sub>, 6H<sub>2</sub>O (0.15 g/L); CoCl<sub>2</sub>, 6H<sub>2</sub>O (0.015 g/L); FeSO<sub>4</sub>, 7H<sub>2</sub>O (0.4 g/L); H<sub>3</sub>BO<sub>3</sub>, H<sub>2</sub>O (6 g/L); ZnCl<sub>2</sub> (8.2 g/L); NiCl<sub>2</sub>, 6H<sub>2</sub>O (2.6 g/L); CuCl<sub>2</sub>, 2H<sub>2</sub>O (1.5 g/L); Na<sub>2</sub>MoO<sub>4</sub>, H<sub>2</sub>O (2.6 g/L); FeCl<sub>2</sub>, 4H<sub>2</sub>O (75 g/L); hemin (0.12 g/L); biotin (0.24 g/L); PABA (0.12 g/L); resazurin (0.12 g/L).



This culture medium was supplemented with glucose at concentration of 20 and 10 g/L in, respectively, the pre-culture and final culture. Other components, such as L-cysteine (0.6 g/L) and carbonates ( $\text{Na}_2\text{CO}_3$ ) (4.8 g/L), were also added to remove the oxygen and maintain the pH 6, respectively [41]. The pre-cultures were prepared in flasks (90 mL) with 10 mL of consortium for 12 h at 30 °C with stirring (150 rpm). The cultures were then degassed and sterilized before being inoculated with 10 mL of inoculum from pre-cultures, with biomass contents of 10 g/L. The fermentation took place at 30 °C with a stirring rate of 150 rpm [42]. A spectrophotometer (Biomate 3S, UV/vis spectrophotometer, Thermo Scientific, France) was used to measure the turbidity at 600 nm. After 24 h, 5 mL of the culture broth was sampled and centrifuged at  $10,000\times g$  for 5 min at 25 °C. One mL of the obtained supernatant was treated and analyzed by high-performance liquid chromatography (HPLC), as previously detailed (Section 2.3.1), to quantify the concentrations of the volatile fatty using acetate (1.25 to 20 g/L), propionate (1 to 20 g/L), and butyrate (1 to 20 g/L) as the standards.

After 24 h of anaerobic fermentation, the biogas volume was quantified using a Terumo<sup>®</sup> syringe. Its quality and composition, particularly the biohydrogen concentration, were determined by a micro-gas chromatograph (Agilent 3000 A, Agilent Technologies, France) with two channels and a thermal conductivity detector. The hydrogen content was measured in the first channel, which was outfitted with a 5 Å column at 60 °C and 30 psi. The obtained data were quantified using the Soprane software [26].

### 2.3.3. Biodiesel Production

The *Yarrowia lipolytica* (MUCL 28849) was from the BCCM/MUCL (Agro) Industrial Fungi and Yeasts Collection in Belgium [43]. The *Y. lipolytica* was kept at 4 °C on potato dextrose agar. The growth medium was made up of:  $\text{K}_2\text{HPO}_4$  (3 g/L);  $\text{Na}_2\text{HPO}_4$ ,  $\text{H}_2\text{O}$  (3 g/L);  $(\text{NH}_4)_2\text{SO}_4$  (3 g/L);  $\text{MgSO}_4 \cdot 7\text{H}_2\text{O}$  (1 g/L);  $\text{ZnSO}_4 \cdot 7\text{H}_2\text{O}$  (0.040 g/L);  $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$  (0.016 g/L);  $\text{MnSO}_4 \cdot \text{H}_2\text{O}$  (0.0038 g/L);  $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$  (0.023 g/L);  $\text{CoCl}_2 \cdot 6\text{H}_2\text{O}$  (0.5 mg/L);  $\text{CuSO}_4 \cdot 5\text{H}_2\text{O}$  (0.0009 g/L);  $\text{Na}_2\text{MoO}_4 \cdot 2\text{H}_2\text{O}$  (0.00006 g/L); and  $\text{H}_3\text{BO}_3$  (0.003 g/L), supplemented by 10 mL/L of a mineral stock solution containing  $\text{MnSO}_4$  (0.38 g/L);  $\text{H}_3\text{BO}_3$  (0.3 g/L);  $\text{ZnSO}_4 \cdot 7\text{H}_2\text{O}$  (4 g/L);  $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$  (1.6 g/L);  $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$  (2.3 g/L); and 1 mL/L of metals' stock solution composed of  $\text{Na}_2\text{MoO}_4 \cdot 2\text{H}_2\text{O}$  (0.06 g/L);  $\text{CoCl}_2 \cdot 6\text{H}_2\text{O}$  (0.5 g/L); and  $\text{CuSO}_4 \cdot 5\text{H}_2\text{O}$  (0.9 g/L) [44]. To prevent precipitation, the pH was lowered to 4.5 with orthophosphoric acid 85% before sterilization and subsequently to 6 with KOH 1 M following sterilization. The yeast preculture was prepared by inoculating 200 mL of medium culture containing glucose (4 g/L) with the *Y. lipolytica* colonies picked from an agar plate and keep for 24 h at 30 °C in a rotary incubator shaker at 100 rpm (INFORS HT, Multitron Standard, Switzerland). Ten mL of pre-culture were used to make cultures with various substrates, RPS, BP1-PS, and BP2-F (2 g/L). Glucose (2 g/L) was used as the positive control.

The cultures were incubated at 30 °C at 200 rpm in the same rotary shaker, and 5 mL of each culture was collected every 5 h. High pressure homogenization was used to disrupt the cells in the samples, through a nozzle at 2500 bar pressure (Constant System Limited, Low March, Daventry NN11 4SD, UK). Half a mL of each collected sample was homogenized with 4 mL of chloroform, 2 mL of methanol, and 1 mL of distilled water. The mixture was then separated into an aqueous superior phase and a lower phase containing the extracted lipids by a centrifugation for 10 min at  $2000\times g$ . The organic phase was then pooled in pre-weighed tubes in 1 mL increments. After evaporating the solvent, the lipids were recovered using a speed-vacuum at 40 °C for 120 min until reaching a constant weight. The lipids were suspended in chloroform and kept at  $-20$  °C. The transesterification was completed, and the fatty acid methyl esters' profile was analyzed, using the method of Morrison and Smith [36]. One hundred mL of the sample were combined with 800 mL of MeOH/ $\text{BF}_3$  (14%) and placed in a water bath at 100 °C for 15 min. After cooling the mixture, 1.5 mL of water was mixed with 750 mL of hexane containing heptadecane, 1% (*v/v*) was added, and 1 mL of the mixture was finally injected and analyzed by gas chromatography

(HP6890, Hewlett Packard, Palo Alto, CA, USA) equipped with a Supelco SPB-5 (Supelco Inc., Bellefonte, PA, USA) capillary column (30 m × 0.32 mm × df 0.25 mm), using nitrogen as a gas vector at 0.80 mL/min and flame ionization as a detector (280 °C). The rise in the temperature was from 170 °C to 220 °C, at a rate of 3 °C/min, for 3 min. The injector was set at 250 °C. The identification of the methyl esters was made by comparing the retention times with known standards. The obtained data were analyzed using MestReNova 7.1.

#### 2.4. Statistical Analyses

All the statistics were determined using the statistical software SigmaPlot 12.5 (Systat Software, SPSS Inc., Chicago, IL, USA). Data were expressed as mean ± standard deviation of three replicates. A *t*-test and post hoc procedures (Tukey test) were performed to compare the data and analyze the pairwise differences. The differences were considered significant for  $p < 0.05$ .

### 3. Results and Discussion

#### 3.1. Chemical Constituents

##### 3.1.1. Ash, Moisture, Proteins, Fats, and Phenolic Contents

The *H. scoparia* biomass and by-product compositions are given in Table 1. A qualitative study of *H. scoparia* shown that the raw biomass contains 3% fat and 7% proteins. According to the literature, the protein content in brown algae can range from 3% to 15% [45], but the fat content is around 5%, as with the total lipids content in *A. nodosum*, 4.46% [46]. The ash and moisture contents of the dried *H. scoparia* were, respectively, 43% and 7%, which is consistent with previous studies reporting that the ashes could vary from 24% to 49% and the moisture between 4% and more than 18%, depending on the season and the genus of the brown seaweed [47–49]. For instance, *H. scoparia* presented a low moisture content which agreed with the values reported for *Undaria pinatifida*, a seaweed used for biofuel production [50]. Furthermore, this macroalgae had 4.4% of phenolic content which is close to the content found for another brown Tunisian seaweed, e.g., *Cystoseira compressa*, with a value of 4.8% [51,52]. It is noteworthy that the harvesting period is an important parameter that can indirectly affect the macroalgal biomass availability and its biochemical composition [53].

**Table 1.** *H. scoparia* (RPS) and by-products' composition after carbohydrate (BP1-PS) and fucoxanthin (BP2-F) extractions.

Composition % ( <i>w/w</i> )	<i>H. scoparia</i> (RPS)	By-Product after Carbohydrate Extraction (BP1-PS)	By-Products after Fucoxanthin Extraction (BP2-F)
Fat	2.92 ± 0.28	1.5 ± 0.52	0.93 ± 0.6
Protein	6.53 ± 0.56	1 ± 0.5	0.87 ± 0.71
Ash	42.63 ± 2.2	47.34 ± 1.4	35.41 ± 2.5
Moisture	6.79 ± 0.16	7.57 ± 0.16	9.06 ± 0.45
Phenolic content	4.4 ± 0.005	0.43 ± 0.0003	0.29 ± 0.0005

This biochemical composition provides information that could be useful in performing the appropriate pretreatments to make *H. scoparia* more suitable for energy production. According to Suutari et al., the protein level can impact the microbial bioconversion of macroalgae [54]. For example, a high protein content (7–20%) can reduce the biohydrogen production [55]. Furthermore, it has been shown that the bioconversion of macroalgae with a high soluble protein content can produce toxic ammonia [55]. In the case of brown macroalgae, the microbial degradation of the constitutive proteins was inhibited, due to their cellular localization and linkages with cell wall polysaccharides [56]. Hou et al. reported that the bioethanol production after macroalgae bioconversion was correlated with their carbohydrate contents, rather with their protein contents [57]. In addition, because of the low lipid concentrations, the production of biofuels from *H. scoparia* primarily depends

on their carbohydrate conversion to bioethanol production, and secondly on their fatty acids' transesterification capacity to produce biodiesel.

The ash content from *H. scoparia* seemed to be high and reflected its mineral content. It can provide functional micronutrients serving to enhance biological conversion, such as anaerobic digestion [58]. In this regard, in comparison to the thermal conversion, biological processing is the most ideal conversion procedure for algae since the algae are the most tolerant of ash content [59]. Regarding the literature, the high quantity of ash increases the onset of the pyrolysis process and then the bio-oil yields. So, *H. scoparia* could produce a low bio-oil yield via fast pyrolysis behavior, due to its high content of ash. According to Bae et al., some of the pretreatments are beneficial for ash reduction [60], but excessive quantities of ash (> 20%) can generate slagging and fouling, which is a key issue for biofuels production [61].

### 3.1.2. Composition in Chemical Elements

*H. scoparia* (RPS) contains macro-, microelements, and heavy metals (Table 2). According to the literature, the levels of these elements can significantly change depending on the species [45]. *H. scoparia* contained lower levels of different micro-, macroelements, and heavy metals than in the *F. vesiculosus* or other French edible macroalgae that are considered suitable for food. This composition highlighted the low food potential of this seaweed and encouraged investigating its bioconversion potential [61]. Note that *H. scoparia* also contained alkali metals, such as K and Na. According to Ross et al., these elements derived from the macroalgae biomass may cause problems with fouling and slagging in gasification and biohydrogen production [62]. The high alkali metal concentrations may also cause the inhibition of bioethanol production [62]. Thus, it is of the utmost importance to identify and quantify these various chemical elements, which allows the determination of whether a particular pretreatment must be applied to the seaweed to reduce the concentration of ash and undesirable chemical elements [62].

**Table 2.** Composition in chemical elements of *H. scoparia* (RPS).

Chemical Elements	mg/kg DW <sup>1</sup>
P	29.950 ± 0.008
Ca	19.919 ± 0.003
K	15.689 ± 0.037
Na	10.350 ± 0.097
Mg	8137.5 ± 0.056
Fe	3946.75 ± 0.023
Mn	51.5 ± 0.005
Ni	23.75 ± 0.008
Zn	23.55 ± 0.012
Cu	6.95 ± 0.01
Pb	4 ± 0.01

<sup>1</sup> DW: dry weight.

### 3.1.3. Sugars' Contents

As shown in Table 3, the total carbohydrate content in *H. scoparia* (RPS) represented 133.9 g/kg, which was much higher than for the carbohydrates' content reported from *S. vulgare* (31.03 ± 6.59 g/kg) [46], or from *C. barbata* (9.6 g/kg) [47]. Note that the brown seaweeds were reported as showing a higher content of carbohydrates during the spring [48]. The BP1-PS and BP2-F fractions were still composed of carbohydrates with, respectively, 79.02 ± 0.03 g/kg and 113.20 ± 0.04 g/kg. The significant difference ( $p < 0.05$ ) between each fraction comes from the extraction methodology, where the BP2-F (obtained after pigment extraction) was not depleted in carbohydrates in comparison to the BP1-PS. These carbohydrate contents, as well as the reducing sugars' values for the by-products, were still close to the quantities reported for raw brown macroalgae, such as *Sargassum obtusifolium*



and *Rosenvingeana nhatrangensis* (123 and 12.6 g/kg, respectively) [49], which highlights their potential as feedstock materials for fermentation, etc.


**Table 3.** Total and reducing sugars contents.

Samples (g/kg DW)	Total Sugars (g/kg)	Reducing Sugars (g/kg)
RPS	133.9 ± 0.12	39.5 ± 0.05
BP1-PS	79.02 ± 0.03	15.73 ± 0.09
BP2-F	113.20 ± 0.04	15.26 ± 0.02

### 3.2. Biofuels' Production from *H. scoparia* and By-Products of Extraction

#### 3.2.1. Production of Bioethanol

The RPS, BP1-PS and BP2-F were subjected to solid state fermentation and used as substrates to generate bioethanol from *Saccharomyces cerevisiae* ATCC7754. This strain was selected owing to its ability to produce important ethanol concentrations, regarding its low sensibility to a high concentration of ethanol, high selectivity for fermentable sugars such as glucose, galactose, and mannose during fermentation, and the capacity to produce a low quantity of by-products [50,51]. Figure 1 shows the evolution of bioethanol production simultaneously with the consumption of fermentable sugars from the RPS, BP1-PS and BP2-F fractions for 72 h. According to the theoretical yield of Gay-Lussac for ethanol production from glucose (0.51 g ethanol/g glucose), around 5.2 g/L of ethanol was produced for the positive control.

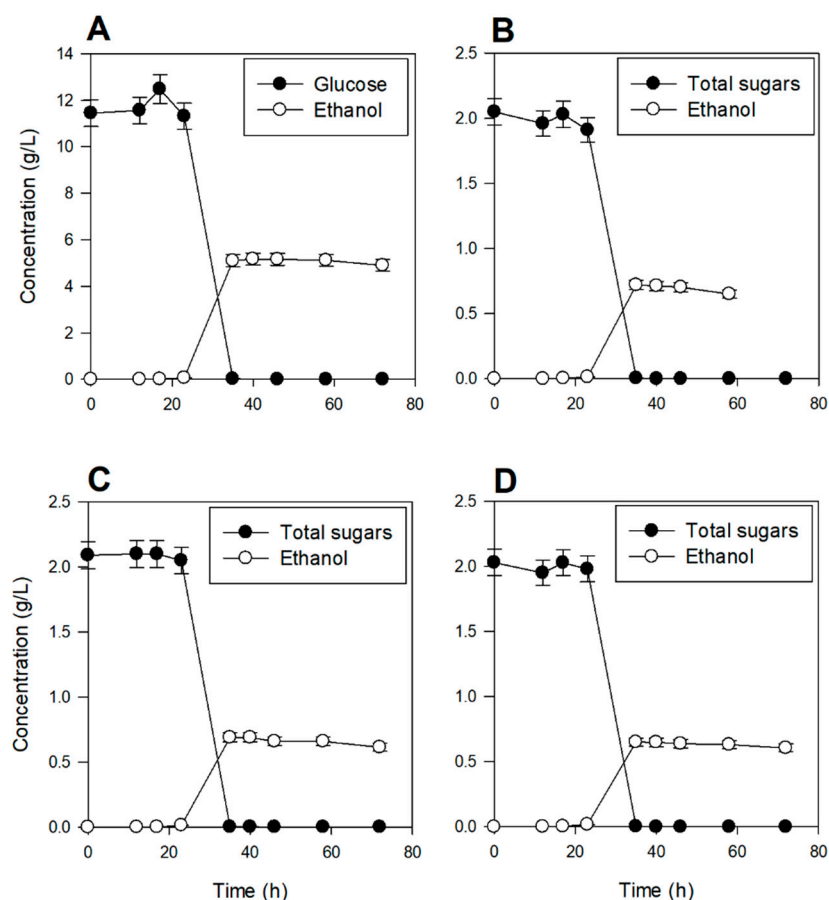

**Figure 1.** Production of ethanol from (A) glucose (positive control); (B) RPS; (C) BP1-PS; and (D) BP2-F fractions. The standard deviations were lower than 5%.

Due to their content of reducing sugars (Table 3), each of the other substrates allowed the production of ethanol, with concentrations ranging from 0.65 to 0.72 g/L during the

three days of fermentation, without a significant difference ( $p > 0.05$ ). This corresponded to 0.35, 0.345, and 0.325 g ethanol/g DW for RPS, BP1-PS, and BP2-F, respectively. The difference between the ethanol production from BP1-PS and BP2-F was explained by the slight difference in the initial content of the reducing sugars. The difference between the yield of ethanol produced from BP1-PS and BP2-F and the yield of RPS could be due to the phenolic compounds present in RPS, which is higher than those of the two by-products (4.4%). Chen et al. showed that the phenolic compounds can affect the fermentation ability of *S. cerevisiae* and reduce ethanol production due to their antimicrobial properties [63]. These results were higher than those reported for the untreated macroalgae *Saccharina japonica* (0.281 g ethanol/g DW) or *Laminaria japonica* (0.28 g ethanol/g DW) [52]. According to Obata et al., this change could be explained by the difference in the constitutive fermentable sugar characteristics of each macroalgae [64].

Better results were reported for the pretreated (mechanical, acid pretreatments, and enzymatic hydrolysis) brown seaweed materials from *Sargassum vulgare* or *Padina tetrastrumatica*, with some yields close to 0.38 and up to 0.66 g ethanol/g DW [12]. For instance, washing, drying, milling, and heating (121 °C for 20 min in an autoclave) macroalgae can be efficient in releasing fermentable biomolecules, by breaking down the outer layer of the cell wall and increasing the surface area [53,54]. Combining the mechanical pretreatment with the use of enzymes can also reduce the generation of fermentation inhibitors [65,66]. Thus, further experiments should be planned to enhance the ethanol production by pretreatment, in particular RPS for more exposing and/or generating of fermentable polymers, oligo- and monomers [65–67]. Other studies highlighted that not only the enzymatic steps can affect the fermentation yields, since additional elements can change the bioethanol production. Mutripah et al. showed that an acid hydrolysis of the seaweed using 0.2 M H<sub>2</sub>SO<sub>4</sub> before treatment at 121 °C for 15 min allowed the generation of the reducing sugars' content of about 60 g/kg DW [68]. *P. australis* was also composed of around 145 g/kg DW total carbohydrates, which was close to the values for *H. scoparia* (133 g/kg DW). However, the use of the *H. scoparia* biomass as a fermentation substrate resulted in a higher ethanol yield (0.35 g ethanol/g DW) than that reported for *P. australis* (0.002 g ethanol/g DW). This finding could be due to the high level of 5-HMF and levulinic acid obtained after hydrolysis using H<sub>2</sub>SO<sub>4</sub>, which could inhibit the fermentation process [68]. It clearly shows the importance of choosing the appropriate hydrolysis pretreatment for significantly enhancing the bioethanol production. Using various enzymes in the mix, such as recombinant alginate lyases, oligo-alginate lyases, and cellulases, can increase the ethanol yields, as reported for the *M. pyrifera* biomass [69]. The authors confirmed that enzymatic treatments could be sufficient for increasing glucose liberation, avoiding the fermentative issues caused by acid and/or thermal pretreatment [69].


The selection of suitable fungal or microbial strains is a crucial aspect of the fermentation process. Identifying the organisms able to convert heterogeneous sugars is still a challenge in bioethanol production from macroalgae [70]. Indigenous halotolerant marine yeast could be used in the fermentation process, considering their tolerance to high contents of salts in ash [71]. It has been outlined that the use of *Candida* sp. could increase the ethanol yield by up to 1.76% for the macroalgae *Kappaphycus alvarezii*, despite the high salt concentrations [71]. Offei et al. [70] reported that acclimatizing yeasts to higher concentrations of some substrates was a way of increasing ethanol output. This was accomplished employing a two-stage fermentation of the hydrolysates from *S. japonica* [72]. *S. cerevisiae* KCCM 1129 was used in the first fermentation stage of *S. japonica* to convert the glucose content into ethanol, while *P. angophorae* KCTC 17574 was utilized in the second fermentation stage to convert the mannitol content into ethanol. The acclimatized *P. angophorae* KCTC 17574 was able to produce about 0.3 g ethanol/g mannitol, instead of 0.13 g ethanol/g mannitol for the non-acclimatized one.

Moreover, the fermentation technique, which simultaneously used saccharification and fermentation (SSF), is reported to be a more productive method than splitting hydrolysis and fermentation (SHF). It saves time, reduces the number of needed unit operations, and

decreases the contamination issues. The SSF method may enhance the level of bioethanol production by avoiding end-product inhibition and the potential loss of sugars [73].

### 3.2.2. Production of Hydrogen and Volatile Fatty Acids

Figure 2 illustrates the volatile fatty acids (VFAs) and the biohydrogen production of the bacterial consortium for 24 h (dark fermentation), using RPS, BP1-PS, and BP2-F fractions as the substrates. Glucose was the positive control (1.85 g/L butyrate, 479 mg/L acetate, 72 mg/L propionate, 40 mL H<sub>2</sub>/g glucose corresponding to 43% H<sub>2</sub> in the total biogas). The results highlighted that each fraction can be used as feedstocks for generating biohydrogen, i.e., 1.3 mL H<sub>2</sub>/g DW (around 1/3 of the yield by using glucose).

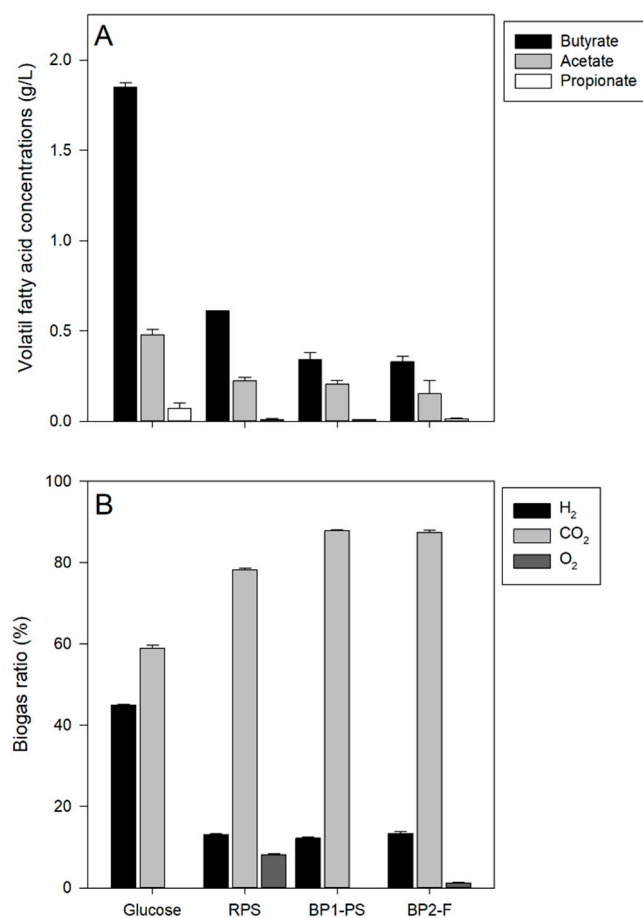

**Figure 2.** Production of (A) VFAs and (B) bio-hydrogen from RPS, BP1-PS, and BP2-F fractions, using glucose as positive control.

Regarding the literature, these results were lower than those observed, for example, by using *Huzikia husiforme* sp. (10.3 mL H<sub>2</sub>/g DW) [74] or the brown seaweed *L. japonica* (58.5 mL H<sub>2</sub>/g DW) as substrates, noting that pretreatments have been applied (acid, alkali, or enzymatic hydrolysis step) for generating more sugars to enhance the level of biohydrogen production [75,76]. However, the yield of H<sub>2</sub> produced from *H. scoparia* (13 mL H<sub>2</sub>/g DW) was slightly higher than the one reported from non-treated *L. japonica* (10 mL H<sub>2</sub>/g DW) [77]. The H<sub>2</sub> production was coupled in the experiments with two preferential biosynthesis pathways for the bacterial consortium [20], one producing acetate, and the second one butyrate. A significant difference ( $p < 0.05$ ) was observed regarding the butyrate concentration (612 mg/L) which was two times higher using the RPS than the BP1-PS and BP2-F fractions. This result comes from the content of reducing sugars, which represented 39.5 g/kg DW in the RPS. The acetate concentrations were close to 154, 205, and 225 mg/L for BP2-F, BP1-PS, and RPS, respectively, without a significant difference. These


data were slightly lower than those reported, for example, from *L. japonica*, *P. elliptica*, and *E. critina* to produce butyric acid (1.9, 2.5, and 2.8 g/L, respectively), acetic acid (4.5, 2.2, and 2.8 g/L, respectively) or propionate (0.6, 0.4, and 0.4 g/L, respectively) [20,74,75]. Having a balanced C:N ratio of 20–30 should help in increasing the productivity, as reported by some papers [20,76–78]. According to the literature, many factors, such as pH, can affect the yield of H<sub>2</sub> production from macroalgae. Thus, the optimal pH to produce biohydrogen from various biomasses can vary between 5.2 to 7, butyrate being the main VFA, produced at pH 7 [79]. So, the butyrate pathway was preferentially used by our consortium to produce biogas from *H. scoparia*; the acetate and propionate being produced in a second step [79].

To increase the H<sub>2</sub> production, heat pretreatments of the biomass could be of crucial importance, in particular to liberate specific alditols and sugars, which could be finally converted into pyruvate, H<sub>2</sub>, butyric acid, and acetate. This pretreatment step seems beneficial when considering the difficulty of mannitol fermenting in anaerobic conditions. Liu et al. showed that the heat pretreatment of *L. japonica* (200 °C) produced a maximum of H<sub>2</sub> yield close to 85.45 mL H<sub>2</sub>/g DW, in comparison with the untreated biomass (10 mL H<sub>2</sub>/g DW) [80]. The relative amount of H<sub>2</sub> produced from *H. scoparia* may also be due to the low initial substrate concentration (1%). Indeed, many of the studies have reported the effect of substrate concentrations on H<sub>2</sub> production. For example, using *L. japonica* (pH = 6), the optimal substrate concentration was 2% to produce the maximum yield of biohydrogen (75.88 mL H<sub>2</sub>/g DW) [80]. Thus, further experiments should be planned to enhance the biohydrogen production from RPS, BP1-PS and BP2-f and by-products for biofuel production since it can still be considered a potential but mid-term suitable alternative for energy production.

### 3.2.3. Biodiesel Production

The time-course measurements of lipids produced by *Y. lipolytica* are shown in Figure 3. The positive control allowed the release of 155 mg/L of lipids after 84 h. The RPS, BP1-PS and BP2-F fractions showed significant differences ( $p < 0.05$ ) in terms of the lipids' concentrations, with some values of 30.5, 1.6 and 13.3 mg/L, respectively. These substrates showed a low potential, probably because of the presence of high nitrogen concentrations in the media and the unbalanced initial C:N ratio, leading to a low yield in the lipid contents [76–78]. Moreover, *Y. lipolytica* is not able to use the VFAs produced in the medium culture for making intracellular lipids. The total lipids content is the principal indicator of biodiesel production from macroalgae. Thus, *H. scoparia* is characterized by a lipid content close to 3% DW. This low total lipid content was in concordance with the literature. Song et al. reported that the level of lipids from brown macroalgae was below 5% DW [81]. In addition, it was observed that the brown macroalgae *S. trinodis* present 1.25% of total lipids, highlighting the low potential of this seaweed for biodiesel production [82]. Regarding literature, the fluctuation in the lipids' levels is influenced by the environmental conditions as well as the intrinsic potential of macroalgae [82].

It is noteworthy that the compositions of fatty acids, as described in Table 4, were closely the same for all the fractions with linoleic (C18:2) and oleic (C18:1) acids representing around 80%, which was consistent with the literature [20]. Liang et al. reported that the composition of fatty acids from soybean and *Jatropha* oils used for generating biodiesel in the United States and European Union was like the composition of fatty acids obtained from lipids, using *H. scoparia* as a carbon source [83]. Fei et al. also showed that the profile of fatty acids, using glucose or VFAs as a carbon source of the lipid accumulation from *C. albidus*, was close to the profile given in Table 4 [83].

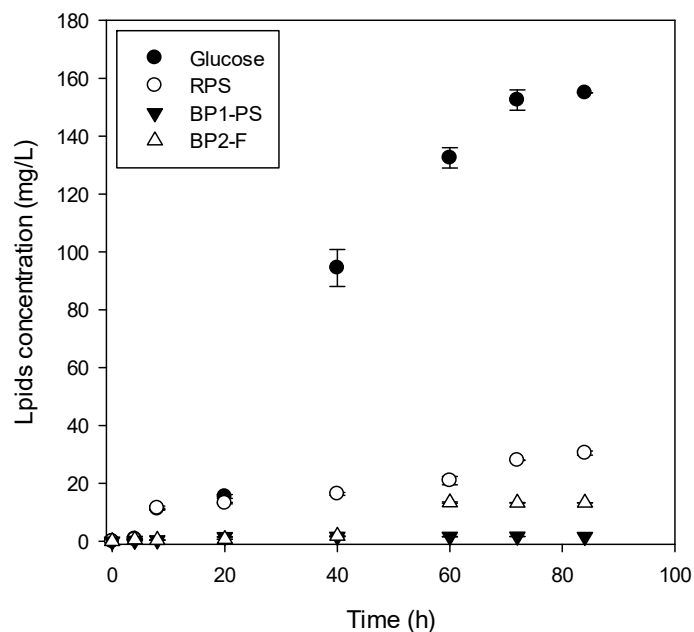

**Figure 3.** Production of lipids by *Y. lipolytica* fermentation from medium enriched with RPS, BP1-PS, and BP2-F fractions, and using glucose as positive control.

**Table 4.** Fatty acids' composition of lipids produced by *Yarrowia lipolytica* from RPS, BP1-PS, and BP2-F.

Fatty Acids Composition	%
Palmitic acid C16:0	11
Palmitoleic acid C16:1	10
Stearic acid C18:0	1
Oleic acid C18:1	28
Linoleic acid C18:2	51
Linolenic acid C18:3	1

These authors also showed that pretreatments are a crucial step to achieve high yields of carbohydrates (alginate and mannitol) or VFAs to be used by oleaginous yeast, such as *Y. lipolytica*, to produce high quality biodiesel. Indeed, the type of fatty acids and the ratio between the SFAs (saturated fatty acids) and UFAs (unsaturated fatty acids) play an important role in determining the quality of biodiesel produced from macroalgae. The *H. scoparia* showed a UFAs > SFAs ratio [82]. The SFAs from *H. scoparia* were higher (11%) than the SFAs' contents reported from *S. trinodis* (1.167%) [82]. High quantities of the SFAs could also improve the stability of biodiesel, whereas high levels of UFAs may enhance the biodiesel fluidity. Thus, combining them correctly could lead and serve to producing biodiesel of a higher quality [82].

#### 4. Conclusions

Transesterification, thermochemical, and biochemical are the principal processes to convert biomass into biofuels; the choice of one of these technologies still being related to the so-called bioconversion. *Halopteris scoparia*, which is an abundant brown seaweed found in Tunisia, showed a significant potential for being used as feedstock for energy conversion. Without an optimal run and specific pretreatment, it was possible to produce ethanol (0.35 g/g DW), H<sub>2</sub> (1.3 mL H<sub>2</sub>/g DW), VFAs (612 mg butyrate/L, 225 mg acetate/L, 11 mg propionate/L) and a small quantity of lipids (30.5 g/L) from the raw macroalgae fraction (RPS). The feasibility of producing energy vectors by using some of the by-products from the extraction processes of high value molecules (polysaccharides, pigments) was also assessed. Further experiments should be planned, for instance by enhancing yields (e.g., pretreatments for upgrading the saccharification), directing metabolic flux using



various experimental parameters, or by changing the content of the inputs. Overall, this work completes the proof of concept for generating alternative and cleaner energy by setting up new processing sectors or making the concept economically viable of biorefinery from North African brown seaweeds. In addition, the processing of by-products to energy can reduce environmental impacts and increase the capacity of energy recovery in power generation.

**Author Contributions:** Conceptualization, G.P., G.C. and S.A.; methodology, F.H., G.P., G.C. and S.A.; validation, G.P., G.C. and S.A.; formal analysis, F.H., G.C. and G.P.; investigation, F.H., G.C. and G.P.; writing—original draft preparation, F.H., G.C., J.E., G.P. and S.A.; writing—review and editing, G.C., J.E., G.P. and S.A.; visualization, G.C., J.E., I.F., M.D.O.E.H., Z.E.A.-T., C.E.M., P.D., C.D., P.M. and G.P.; supervision, G.P., J.E. and S.A.; project administration, G.P.; funding acquisition, S.A., Z.E.A.-T., Z.B. and G.P. All authors have read and agreed to the published version of the manuscript.

**Funding:** This work was funded by Campus France (41423UC), the Hubert Curien Program PHC Maghreb (EXPLORE 2019–2021, 19MAG36); the French Ministry of Europe and Foreign Affairs and the Moroccan, Algerian, and Tunisian Ministries of Higher Education and Scientific Research; the National Centre for Scientific and Technical Research (CNRST Morocco), grant number 4UCA2018.

**Institutional Review Board Statement:** Not applicable.

**Informed Consent Statement:** Not applicable.

**Data Availability Statement:** Not applicable.

**Conflicts of Interest:** The authors declare no conflict of interest.

## References

- Godvin Sharmila, V.; Kumar, D.; Pugazhendi, A. Biofuel production from macroalgae: Present scenario and future scope. *Bioengineered* **2021**, *12*, 9216–9238. [[CrossRef](#)]
- Hentati, F.; Delattre, C.; Gardarin, C.; Desbrières, J.; Le Cerf, D.; Rihouey, C.; Michaud, P.; Abdelkafi, S.; Pierre, G. Structural features and rheological properties of a sulphated xylogalactan-rich fraction isolated from Tunisian red seaweed *Jania adhaerens*. *Appl. Sci.* **2020**, *10*, 1655. [[CrossRef](#)]
- Biris-Dorhoi, E.; Michiu, D.; Pop, C.; Rotar, A.M.; Tofana, M.; Pop, O.L.; Socaci, S.A.; Farcas, A.C. Macroalgae—A sustainable source of chemical compounds with biological activities. *Nutrients* **2020**, *12*, 3085. [[CrossRef](#)] [[PubMed](#)]
- Bilal, M.; Iqbal, H. Marine seaweed polysaccharides-based engineered cues for the modern biomedical sector. *Mar. Drugs* **2019**, *18*, 7. [[CrossRef](#)]
- Hentati, F.; Pierre, G.; Ursu, A.V.; Vial, C.; Delattre, C.; Abdelkafi, S.; Michaud, P. Rheological investigations of water-soluble polysaccharides from the Tunisian brown seaweed *Cystoseira compressa*. *Food Hydrocoll.* **2020**, *103*, 105631. [[CrossRef](#)]
- Leandro, A.; Pacheco, D.; Cotas, J.; Marques, J.C.; Pereira, L.; Gonçalves, A.M.M.M. Seaweed's bioactive candidate compounds to food industry and global food security. *Life* **2020**, *10*, 140. [[CrossRef](#)] [[PubMed](#)]
- Michalak, I.; Chojnacka, K. Algae as production systems of bioactive compounds. *Eng. Life Sci.* **2015**, *15*, 160–176. [[CrossRef](#)]
- Mhadhebi, L.; Dellai, A.; Clary-Laroche, A.; Ben Said, R.; Robert, J.; Bouraoui, A. Anti-inflammatory and antiproliferative activities of organic fractions from the Mediterranean brown seaweed, *Cystoseira compressa*. *Drug Dev. Res.* **2012**, *73*, 82–89. [[CrossRef](#)]
- Ktari, L.; Guyot, M. A cytotoxic oxysterol from the marine alga *Padina pavonica* (L.) Thivy. *J. Appl. Phycol.* **1999**, *11*, 511–513. [[CrossRef](#)]
- El-Shafei, R.; Hegazy, H.; Acharya, B. A review of antiviral and antioxidant activity of bioactive metabolite of macroalgae within an optimized extraction method. *Energies* **2021**, *14*, 3092. [[CrossRef](#)]
- Indira, K.; Balakrishnan, S.; Srinivasan, M.; Bragadeeswaran, S.; Balasubramanian, T. Evaluation of in vitro antimicrobial property of seaweed (*Halimeda tuna*) from Tuticorin coast, Tamil Nadu, southeast coast of India. *Afr. J. Biotechnol.* **2013**, *12*, 284–289. [[CrossRef](#)]
- Ganesan, A.R.; Tiwari, U.; Rajauria, G. Seaweed nutraceuticals and their therapeutic role in disease prevention. *Food Sci. Hum. Wellness* **2019**, *8*, 252–263. [[CrossRef](#)]
- Lordan, S.; Ross, R.P.; Stanton, C. Marine bioactives as functional food ingredients: Potential to reduce the incidence of chronic diseases. *Mar. Drugs* **2011**, *9*, 1056–1100. [[CrossRef](#)] [[PubMed](#)]
- Saini, R.K.; Keum, Y.-S. Omega-3 and Omega-6 polyunsaturated fatty acids: Dietary sources, metabolism, and significance—A review. *Life Sci.* **2018**, *203*, 255–267. [[CrossRef](#)]
- Panahi, H.K.S.; Dehghani, M.; Aghbashlo, M.; Karimi, K.; Tabatabaei, M. Shifting fuel feedstock from oil wells to sea: Iran outlook and potential for biofuel production from brown macroalgae (*ochrophyta*; *phaeophyceae*). *Renew. Sustain. Energy Rev.* **2019**, *112*, 626–642. [[CrossRef](#)]

16. Singh, A.; Olsen, S.I.; Nigam, P.S. A viable technology to generate third-generation biofuel. *J. Chem. Technol. Biotechnol.* **2011**, *86*, 1349–1353. [[CrossRef](#)]
17. Dammer, L.; Carus, M.; Piotrowski, S.; Puente, A.; Breitmayer, E.; de Beus, N.; Liptow, C. Sustainable first and second-generation bioethanol for Europe: A sustainability assessment in the context of the European Commission's REDII proposal. *Ind. Biotechnol.* **2017**, *13*, 6. [[CrossRef](#)]
18. Aresta, M.; Dibenedetto, A.; Barberio, G. Utilization of macro-algae for enhanced CO<sub>2</sub> fixation and biofuels production: Development of a computing software for an lca study. *Fuel Process. Technol.* **2005**, *86*, 1679–1693. [[CrossRef](#)]
19. Levine, R.B.; Pinnarat, T.; Savage, P. Biodiesel production from wet algal biomass through in situ lipid hydrolysis and supercritical transesterification. *Energy Fuels* **2010**, *24*, 5235–5243. [[CrossRef](#)]
20. Chen, H.; Zhou, D.; Luo, G.; Zhang, S.; Chen, J. Macroalgae for biofuels production: Progress and perspectives. *Renew. Sustain. Energy Rev.* **2015**, *47*, 427–437. [[CrossRef](#)]
21. Konda, N.V.S.N.; Singh, S.; Simmons, B.; Klein-Marcuschamer, D. An investigation on the economic feasibility of macroalgae as a potential feedstock for biorefineries. *Bioenergy Res.* **2015**, *8*, 1046–1056. [[CrossRef](#)]
22. Soliman, R.M.; Younis, S.A.; El-gendy, N. Batch bioethanol production via the biological and chemical saccharification of some Egyptian marine macroalgae. *J. Appl. Microbiol.* **2018**, *125*, 422–440. [[CrossRef](#)] [[PubMed](#)]
23. Aboulkas, A.; Hammani, H.; El Achaby, M. Valorization of algal waste via pyrolysis in a fixed-bed reactor: Production and characterization of bio-oil and bio-char. *Bioresour. Technol.* **2017**, *243*, 400–408. [[CrossRef](#)] [[PubMed](#)]
24. El Maghraby, D.; Fakhry, E. Lipid content and fatty acid composition of Mediterranean macro-algae as dynamic factors for biodiesel production. *Oceanologia* **2015**, *57*, 86–92. [[CrossRef](#)]
25. Yanagisawa, M.; Kawai, S.; Murata, K. Strategies for the production of high concentrations of bioethanol from seaweeds: Production of high concentrations of bioethanol from seaweeds. *Bioengineered* **2013**, *4*, 224–235. [[CrossRef](#)]
26. Béligon, V.; Noblecourt, A.; Christophe, G.; Lebert, A.; Larroche, C.; Fontanille, P. Proof of concept for biorefinery approach aiming at two bioenergy production compartments, hydrogen and biodiesel, coupled by an external membrane. *Biofuels* **2018**, *9*, 163–174. [[CrossRef](#)]
27. Hentati, F.; Delattre, C.; Ursu, A.V.; Desbrières, J.; Le Cerf, D.; Gardarin, C.; Abdelkafi, S.; Michaud, P.; Pierre, G. Structural characterization and antioxidant activity of water-soluble polysaccharides from the Tunisian brown seaweed *Cystoseira compressa*. *Carbohydr. Polym.* **2018**, *198*, 589–600. [[CrossRef](#)]
28. Ermakova, S.; Men'shova, R.; Vishchuk, O.; Kim, S.-M.; Um, B.-H.; Isakov, V.; Zvyagintseva, T. Water-soluble polysaccharides from the brown alga *Eisenia bicyclis*: Structural characteristics and antitumor activity. *Algal Res.* **2013**, *2*, 51–58. [[CrossRef](#)]
29. Jaswir, I.; Noviendri, D.; Salleh, H.M.; Miyashita, K. Fucoxanthin extractions of brown seaweeds and analysis of their lipid fraction in methanol. *Food Sci. Technol. Res.* **2012**, *18*, 251–257. [[CrossRef](#)]
30. Barkallah, M.; Dammak, M.; Louati, I.; Hentati, F.; Hadrich, B.; Mechichi, T.; Ayadi, M.A.; Fendri, I.; Attia, H.; Abdelkafi, S. Effect of *Spirulina platensis* fortification on physicochemical, textural, antioxidant and sensory properties of yogurt during fermentation and storage. *LWT Food Sci. Technol.* **2017**, *84*, 323–330. [[CrossRef](#)]
31. Chakou, F.Z.; Boual, Z.; Ould El Hadj, M.D.; Belkhalifa, H.; Bachari, K.; El Alaoui-Talibi, Z.; El Modafar, C.; Hadjkacem, F.; Fendri, I.; Abdelkafi, S.; et al. Pharmacological investigations in traditional utilization of *Alhagi maurorum* Medik. in Saharan Algeria: In vitro study of anti-inflammatory and antihyperglycemic activities of water-soluble polysaccharides extracted from the seeds. *Plants* **2021**, *10*, 2658. [[CrossRef](#)] [[PubMed](#)]
32. Dubois, M.; Gilles, K.A.; Hamilton, J.K. Colorimetric method for determination of sugars and related substances. *Anal. Chem.* **1956**, *28*, 350–356. [[CrossRef](#)]
33. Waffenschmidt, S.; Jaenicke, L. Assay of reducing sugars in the nanomole range with 2,2'-bicinchoninate. *Anal. Biochem.* **1987**, *165*, 337–340. [[CrossRef](#)]
34. Kumar, Y.; Singhal, S.; Tarafdar, A.; Pharande, A.; Ganesan, M.; Badgujr, P.C. Ultrasound assisted extraction of selected edible macroalgae: Effect on antioxidant activity and quantitative assessment of polyphenols by liquid chromatography with tandem mass spectrometry (LC-MS/MS). *Algal Res.* **2020**, *52*, 102114. [[CrossRef](#)]
35. Singleton, V.; Rossi, J. Colorimetry of total phenolics with phosphomolybdic-phosphotungstic acid reagents. *Am. J. Enol. Vitic.* **1965**, *16*, 144–158. [[CrossRef](#)]
36. Elleuch, J.; Hmani, R.; Drira, M.; Michaud, P.; Fendri, I.; Abdelkafi, S. Potential of three local marine microalgae from Tunisian coasts for cadmium, lead and chromium removals. *Sci. Total Environ.* **2021**, *799*, 149464. [[CrossRef](#)]
37. Ramola, B.; Kumar, V.; Nanda, M.; Mishra, Y.; Tyagi, T.; Gupta, A.; Sharma, N. Evaluation, comparison of different solvent extraction, cell disruption methods and hydrothermal liquefaction of oedogonium macroalgae for biofuel production. *Biotechnol. Rep.* **2019**, *22*, e00340. [[CrossRef](#)]
38. Mæhre, H.K.; Dalheim, L.; Edvinsen, G.K.; Elvevoll, E.O.; Jensen, I.-J. Protein determination—Method matters. *Foods* **2018**, *7*, 5. [[CrossRef](#)]
39. Bahry, H.; Pons, A.; Abdallah, R.; Pierre, G.; Delattre, C.; Fayad, N.; Taha, S.; Vial, C. Valorization of carob waste: Definition of a second-generation bioethanol production process. *Bioresour. Technol.* **2017**, *235*, 25–34. [[CrossRef](#)]
40. Soyez, K. Integrated design of a fermentation plant: The production of Baker's yeast. *Engineering* **1995**, *15*, 209–210. [[CrossRef](#)]
41. Gaudet, G.; Forano, E.; Dauphin, G.; Delort, A.M. Futile cycling of glycogen in fibrobacter succinogenes as shown by in situ 1H-NMR and 13C-NMR investigation. *Eur. J. Biochem.* **1992**, *207*, 155–162. [[CrossRef](#)] [[PubMed](#)]

42. Noblecourt, A.; Christophe, G.; Larroche, C.; Santa-Catalina, G.; Trably, E.; Fontanille, P. High hydrogen production rate in a submerged membrane anaerobic bioreactor. *Int. J. Hydrogen Energy* **2017**, *42*, 24656–24666. [[CrossRef](#)]
43. Fontanille, P.; Kumar, V.; Christophe, G. Bioconversion of volatile fatty acids into lipids by the oleaginous yeast *Yarrowia lipolytica*. *Bioresour. Technol.* **2012**, *114*, 443–449. [[CrossRef](#)]
44. Christophe, G.; Deo, J.L.; Kumar, V.; Nouaille, V.; Fontanille, P.; Larroche, C. Production of oils from acetic acid by the oleaginous yeast *Cryptococcus curvatus*. *Appl. Biochem. Biotechnol.* **2012**, *167*, 1270–1279. [[CrossRef](#)] [[PubMed](#)]
45. Fleurence, J. Seaweed proteins: Biochemical, nutritional aspects and potential uses. *Trends Food Sci. Technol.* **1999**, *10*, 25–28. [[CrossRef](#)]
46. Miyashita, K.; Mikami, N.; Hosokawa, M. Chemical and nutritional characteristics of brown seaweed lipids. *J. Funct. Foods* **2013**, *5*, 1507–1517. [[CrossRef](#)]
47. Rosell, K.G.; Srivastava, L.M. Seasonal variation in the chemical constituents of the brown algae *Macrocystis integrifolia* and *Nereocystis luetkeana*. *Can. J. Bot.* **1984**, *62*, 2229–2236. [[CrossRef](#)]
48. Leyton, A.; Pezoa-conte, R.; Barriga, A.; Buschmann, A.H.; Maki-Arvela, P.; Mikkola, J.-P.; Linqueo, M.E. Identification and efficient extraction method of phlorotannins from the brown seaweed *Macrocystis pyrifera* using an orthogonal experimental design. *Algal Res.* **2016**, *16*, 201–208. [[CrossRef](#)]
49. Hay, C.H. The distribution of *Macrocystis* (phaeophyta: Laminariales) as a biological indicator of cool sea surface temperature, with special reference to new Zealand waters. *J. R. Soc. N. Z.* **1990**, *20*, 313–336. [[CrossRef](#)]
50. Cassani, L.; Lourenço-Lopes, C.; Barral-Martinez, M.; Chamorro, F.; Garcia-Perez, P.; Simal-Gandara, J.; Prieto, M.A. Thermochemical characterization of eight seaweed species and evaluation of their potential use as an alternative for biofuel production and source of bioactive compounds. *Int. J. Mol. Sci.* **2022**, *23*, 2355. [[CrossRef](#)]
51. Chkhikvishvili, I.D.; Ramazanov, Z.M. Phenolic substances of brown algae and their antioxidant activity. *Appl. Biochem. Microbiol.* **2000**, *36*, 289–291. [[CrossRef](#)]
52. Generalić Mekinić, I.; Skroza, D.; Simat, V.; Hamed, I.; Čagalj, M.; Popović Perković, Z. Phenolic content of brown algae (Pheophyceae) species: Extraction, identification, and quantification. *Biomolecules* **2019**, *9*, 244. [[CrossRef](#)] [[PubMed](#)]
53. Ahmad, M.S.; Mehmood, M.A.; Al Ayed, O.S.; Ye, G.; Luo, H.; Ibrahim, M.; Rashid, U.; Nehdi, I.A.; Qadir, G. Kinetic analyses and pyrolytic behavior of Para grass (*Urochloa mutica*) for its bioenergy potential. *Bioresour. Technol.* **2017**, *224*, 708–713. [[CrossRef](#)]
54. Suutari, M.; Leskinen, E.; Fagerstedt, K.; Kuparinen, J.; Kuuppo, P.; Blomster, J. Macroalgae in biofuel production. *Phycol. Res.* **2015**, *63*, 1–18. [[CrossRef](#)]
55. Xia, A.; Jacob, A.; Herrmann, C. Production of hydrogen, ethanol and volatile fatty acids from the seaweed carbohydrate mannitol. *Bioresour. Technol.* **2015**, *193*, 488–497. [[CrossRef](#)]
56. Thompson, T.M.; Young, B.; Baroutian, S. Advances in the pretreatment of brown macroalgae for biogas production. *Fuel Proc. Technol.* **2019**, *195*, 106151. [[CrossRef](#)]
57. Hou, X.; Hansen, J.H.; Bjerre, A. Integrated bioethanol and protein production from brown seaweed *Laminaria digitata*. *Bioresour. Technol.* **2015**, *197*, 310–317. [[CrossRef](#)]
58. Mayala, T.S.; Ngavouka, M.D.N.; Douma, D.H.; Hammerton, J.M.; Ross, A.B.; Brown, A.E.; M’Passi-Mabiala, B.; Lovett, J.C. Characterisation of Congolese Aquatic Biomass and Their Potential as a Source of Bioenergy. *Biomass* **2022**, *2*, 1–13. [[CrossRef](#)]
59. Montingelli, M.E.; Tedesco, S.; Olabi, A.G. Biogas production from algal biomass: A review. *Renew. Sustain. Energy Rev.* **2015**, *43*, 961–972. [[CrossRef](#)]
60. Bae, Y.; Ryu, C.; Jeon, J. The characteristics of bio-oil produced from the pyrolysis of three marine macroalgae. *Bioresour. Technol.* **2011**, *102*, 3512–3520. [[CrossRef](#)]
61. Balina, K.; Romagnoli, F.; Blumberga, D. Chemical composition and potential use of *Fucus vesiculosus* from Gulf of Riga. *Energy Procedia* **2016**, *95*, 43–49. [[CrossRef](#)]
62. Milla, S.; Elina, L.; Kurt, F.; Jorma, K.; Pirjo, K.; Jaanika, B. Macroalgae in biofuel production. *Phycol. Res.* **2014**. [[CrossRef](#)]
63. Chen, X.; Zhai, R.; Li, Y. Understanding the structural characteristics of water-soluble phenolic compounds from four pretreatments of corn stover and their inhibitory effects on enzymatic hydrolysis and fermentation. *Biotechnol. Biofuels* **2020**, *13*, 1–13. [[CrossRef](#)] [[PubMed](#)]
64. Obata, O.; Akunna, J.; Bockhorn, H. Ethanol production from brown seaweed using non-conventional yeasts. *Bioethanol* **2016**, *2*, 134–145. [[CrossRef](#)]
65. Bonanno, G.; Orlando-bonaca, M. Chemical elements in Mediterranean macroalgae. *Ecotoxicol. Environ. Saf.* **2018**, *148*, 44–71. [[CrossRef](#)]
66. Ozgun, S.; Turan, F. Biochemical composition of some brown algae from Iskenderun bay, the northeastern Mediterranean coast of turkey. *J. Blac Sea Mediterr. Environ.* **2015**, *21*, 125–134.
67. Manev, Z.; Iliev, A.; Vachkova, V. Chemical characterization of brown seaweed—*Cystoseira barbata*. *Bulg. J. Agric. Sci.* **2013**, *19*, 12–15.
68. Mutripah, S.; Meinita, m.; Kang, J. Bioethanol production from the hydrolysate of *Palmaria palmata* using sulfuric acid and fermentation with brewer’s yeast. *J. Appl. Phycol.* **2014**, *26*, 687–693. [[CrossRef](#)]
69. Raval, M.C.; Sharma, S.; Gimpel, J. The role of alginate lyases in the enzymatic saccharification of brown macroalgae, *Macrocystis pyrifera* and *Saccharina latissima*. *Algal Res.* **2017**, *26*, 287–293. [[CrossRef](#)]

70. Offei, F.; Mensah, M.; Thygesen, A. Seaweed bioethanol production: A process selection review on hydrolysis and fermentation. *Fermentation* **2018**, *4*, 99. [[CrossRef](#)]
71. Khambhaty, Y.; Upadhyay, D.; Kriplani, Y. Bioethanol from macroalgal biomass: Utilization of marine yeast for production of the same. *BioEnergy Res.* **2013**, *6*, 188–195. [[CrossRef](#)]
72. Ra, C.H.; Kim, S.K. Optimization of pretreatment conditions and use of a two-stage fermentation process for the production of ethanol from seaweed, *Saccharina japonica*. *Biotechnol. Bioproc. Eng.* **2013**, *18*, 715–720. [[CrossRef](#)]
73. Olofsson, K.; Bertilsson, M.; Lidén, G. A short review on SSF—An interesting process option for ethanol production from lignocellulosic feedstocks. *Biotechnol. Biofuels* **2008**, *1*, 1–14. [[CrossRef](#)] [[PubMed](#)]
74. Abdel-Fattah, A.F.; Hussein, M.M. Composition of some brown algae as influenced by seasonal variation. *Phytochemistry* **1970**, *9*, 721–724. [[CrossRef](#)]
75. Khalid, A.; Aslam, M.; Qyyum, M.A.; Faisal, A.; Khan, A.L.; Ahmed, F.; Lee, M.; Kim, J.; Jang, N.; Chang, I.S.; et al. Membrane separation processes for dehydration of bioethanol from fermentation broths: Recent developments, challenges, and prospects. *Renew. Sustain. Energy Rev.* **2019**, *105*, 427–443. [[CrossRef](#)]
76. Maneein, S.; Milledge, J.J.; Nielsen, B.V.; Harvey, P.J. A review of seaweed pre-treatment methods for enhanced biofuel production by anaerobic digestion or fermentation. *Fermentation* **2018**, *4*, 100. [[CrossRef](#)]
77. Fasahati, P.; Liu, J.J. Process simulation of bioethanol production from brown algae. *IFAC Proceed. Vol.* **2012**, *45*, 597–602. [[CrossRef](#)]
78. Popper, Z.A.; Ralet, M.C.; Domozych, D.S. Plant and algal cell walls: Diversity and functionality. *Ann. Bot.* **2014**, *114*, 1043–1048. [[CrossRef](#)]
79. Noblecourt, A.; Christophe, G.; Larroche, C. Hydrogen production by dark fermentation from pre-fermented depackaging food wastes. *Bioresour. Technol.* **2018**, *247*, 864–870. [[CrossRef](#)]
80. Liu, H.; Wang, G. Fermentative hydrogen production from macro-algae *Laminaria japonica* using anaerobic mixed bacteria. *Int. J. Hydrog. Energy* **2014**, *39*, 9012–9017. [[CrossRef](#)]
81. Song, M.; Pham, H.D.; Seon, J. Marine brown algae: A conundrum answer for sustainable biofuels production. *Renew. Sustain. Energy Rev.* **2015**, *50*, 782–792. [[CrossRef](#)]
82. Jeliani, Z.Z.; Fazelian, N.; Yousefzadi, M. Introduction of macroalgae as a source of biodiesel in Iran: Analysis of total lipid content, fatty acid and biodiesel indices. *J. Mar. Biol. Assoc. U. K.* **2021**, *101*, 527–534. [[CrossRef](#)]
83. Fei, Q.; Chang, H.N.; Shang, L. The effect of volatile fatty acids as a sole carbon source on lipid accumulation by *Cryptococcus albidus* for biodiesel production. *Bioresour. Technol.* **2011**, *102*, 2695–2701. [[CrossRef](#)] [[PubMed](#)]